

SPEC SHEET

Rubber Roll-Up Doors


HDM model Manual Rubber Door



GENERAL DESCRIPTION: Suitable for applications up to 15 feet in width or height, Self-supporting steel mounting angle, Knock-away double angle steel bottom bar for 10lb/ft with rubber loop, Manual chain hoist, Counterbalance spring assembly cycle rating of 50,000

APPLICATION EXAMPLE: Manufacturing Process and Maintenance Buildings in: mining, petroleum, military, agriculture, pulp & paper, and steel.

DOOR SIZES:

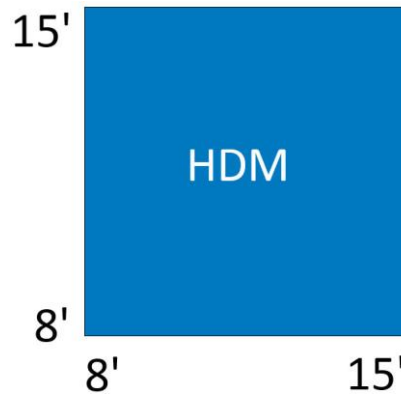

Standard Features

- ¼" SBR rubber, polyester core weave.
- Reliability in temperatures of -40 degrees Fahrenheit to +180 degrees Fahrenheit.
- 2-year warranty on parts and workmanship.
- Sleek profile, easy installation, reduced clearances & minimal maintenance.
- No hinges, cables, pulleys or tension springs.
- Limited lifetime warranty on curtain and NEWGEN Guide System.
- Patented NEWGEN Guide and Curtain Lok System. After an impact, the door is up and running in minutes.

TNR® Mechanical Features

- 1/4" Black SBR rubber with polyester core weave. Flexible and resistant to abusive environments and impacts in temperatures from -40°F to +180°F.
- Patented NEWGEN® guide and Curtain Lok™ system. Reliable and consistent door operation and impact release performance. No guide gap maintenance required.
- Impactable: After impact, the door is up and running in minutes.
- Knock-away double angle steel bottom bar with rubber loop and reversing edge.
- Sleek profile with easy installation, reduced clearances & minimal maintenance. No hinges, cables, pulleys or tension springs
- Self-supporting steel frame
- Guide mounted thru-beam photoelectric sensor.
- Options: colors, windows, hoods, traveling windbar and MSHA-rated self-extinguishing curtains.

Standard Features	HDM	HDE
Door Sizes—8' x 8' up to	15' x 15'	20' x 20'
Opening Speed—Up to 18 inches per second.		●
Type of balancing—Counterbalance spring assembly cycle rating.	50K	100K
Type of curtain—1/4" Black SBR rubber with polyester core weave.	●	●
Reversing edge—Pressure sensitive wireless edge.		●
Controls—NEMA 1 Operator Mounted Controls, relay logic		●
Activation—Remotes, pull cords, loop detectors.		●
Self Supporting Steel Frame—Steel Mounting Angle.	●	●
Warranty—Limited lifetime warranty on curtain and NEWGEN® Guide. Two years on all other parts and workmanship.	●	●

Additional Door Options

MECHANICAL OPTIONS	
<input type="checkbox"/>	- GUIDE MOUNTED WINDBAR
<input type="checkbox"/>	- JAMB MOUNTED WINDBAR
<input type="checkbox"/>	- GUIDE GUARDS
<input type="checkbox"/>	- *** EXTERIOR HOODS
<input type="checkbox"/>	- *** SAFETY CHAIN GUARDS
<input type="checkbox"/>	- 16" x 16" WINDOWS, QTY. _____
<input type="checkbox"/>	- BLUE EPDM CURTAIN
<input type="checkbox"/>	- GRAY EPDM CURTAIN
<input type="checkbox"/>	-
<input type="checkbox"/>	-
<input type="checkbox"/>	-
<input type="checkbox"/>	-

TNR Standard Door Features Guide

Model	Mounting Location (Interior/Exterior)	Opening Type (Interior/Exterior)	Static Winload (PSF)	Maximum W x H (ft)	Std. Curtain Material	Guides	Standard Controls	Optional Controls	Operator	Max. Opening Speed ² (inches per second)	Spring Cycle Rating (.000)	Egress	Standard Photo Cell	Standard Reversing Edge
HDM	Int / Ext	Int / Ext	20	20 x 20	SBR Rubber	Aluminum	n/a	n/a	Manual Chain Hoist	n/a	50	Manual Chain Hoist	n/a	n/a
HDE	Int / Ext	Int / Ext	20	20 x 20	SBR Rubber	Aluminum	OMC	Relay Logic, PLC	RG	18	100	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDS	Int / Ext	Int / Ext	20	20 x 20	SBR Rubber	Aluminum	PLC / VFD	none	HG	60	100	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDT	Int / Ext	Int / Ext	20	20 x 20	SBR Rubber	Aluminum	PLC	OMC, Relay Logic	HG	30	100	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDC	Int / Ext	Int / Ext	20	20 x 20 or 25 x 15	SBR Rubber	Aluminum	PLC / VFD	none	HG	30	n/a	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDC_DD	Int / Ext	Int / Ext	20	20 x 20 or 25 x 15	SBR Rubber	Aluminum	Feig	PLC / VFD ³	GFA	48	n/a	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDP	Int / Ext	Int / Ext	20	25 x 10	SBR Rubber	Aluminum	PLC / VFD	none	HG	30	n/a	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDL23	Int / Ext	Int / Ext	20	20 x 30 or 25 x 20	SBR Rubber	Aluminum	PLC	OMC, Relay Logic	HG	20	50	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDL45	Int / Ext	Int / Ext	20	25 x 30 or 30 x 20	SBR Rubber	Aluminum	PLC	OMC, Relay Logic	HG	18	50	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDL_DD	Int / Ext	Int / Ext	20	No exact size ¹	SBR Rubber	Aluminum	Feig	PLC / VFD ³	GFA	48	n/a	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDXL6	Int / Ext	Int / Ext	20	35 x 25	SBR Rubber	Aluminum	PLC	OMC, Relay Logic	HG	12	50	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDXL9 ⁵	Int / Ext	Int / Ext	20	55 x 35	SBR Rubber	Aluminum	PLC	OMC, Relay Logic	HG	12	50	Emergency Chain Hoist	Through Beam	No reversing Edge
HDF	Interior	Interior	n/a	16 x 16	PVC Fabric	Aluminum	Feig	none	GFA	60	n/a	Emergency Hand Crank	Through Beam	ASO 2 Wire Edge
Chillfast	Interior	Interior	n/a	12 x 16	Insulated PVC	Aluminum	Feig	none	GFA	75	n/a	Emergency Hand Crank	Through Beam	ASO 2 Wire Edge
HSR-007	Int / Ext	Int / Ext	20	19 x 19	Aluminum Slat	Galv. Steel	Feig	none	GFA	54 ⁴	n/a	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDFX	Int / Ext	Int / Ext	20	18 x 18	SBR Rubber / PVC	Aluminum	Feig	none	GFA	60	n/a	Emergency Chain Hoist	Through Beam	Wireless Air Wave
HDD	Int / Ext	Int / Ext	20	10 x 12	SBR Rubber	Aluminum	n/a	n/a	Manual Chain Hoist	n/a	25	Manual Chain Hoist	n/a	n/a

BODE

MATERIAL HANDLING SOLUTIONS

www.bodedockanddoor.com

www.bodeequipment.com

800-797-5699